Bluetooth adapter



Products introduction

BT-1 and BT-2 are Bluetooth modules for our company's solar charge controllers. With mobile phone APP, they realise wirless monitoring, parameter setting and data viewing.

Main feature

- 1. Realize the solar controller of wireless monitoring function
- 2. Support mobile phone APP, plug and play, simple setting
- 3.The use of high performance,low power consumption of the bluetooth special chip
- 4.Adopt bluetooth 4.0 and BLE technology,has the characteristics of rapid communication and strong anti-jamming capability
- 5. Without external power supply, power supply directly by the communication port
- 6.Communication distance of up to 15 meters

Products features




Indicator light instruction

Indicator light	State		Explain
Link indicator light	BT-1	BT-2	In the
	Red blink	Blub blink	communication
	Put out		Idle state

Applicable types

Model	BT-1	BT-2
Apply series	All of our controllers that employ RS232 communication and RJ11 or RJ12 port	All of our controllers that employ TTL level communication and PH2.0 port
Communication methods	RS232	TTL
controller port	RJ12	PH2.0-4

Product Dimensions

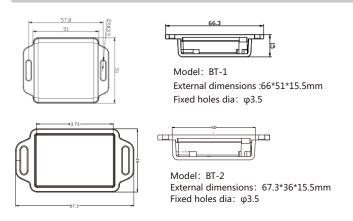

System wiring diagram



Note: Cable using the standard Ethernet cable (parallel line) connect.

Applicable types

Туре	BT-1	BT-2	
Input voltage	5V-12V		
Stand-by power consumption	0.04W		
Run power consumption	0.05W		
Communication distance	≤15m		
Serial port baud rate	Fixed baud rate 9600bps		
Communication methods	RS232	TTL	
Interface type	RJ12	PH2.0-4	
Connecting line	Standard Ethernet cable(parallel line)		
Size	66*51*15.5mm	67.3*36*15.5mm	
Installation dimension	57.8*12mm	57.8*12mm	
Fixed holes dia	φ3.5		
Operating temperature	-20℃-75℃		
Level of protection	IP67	IP52	
Net weight	120g		

Download Bluetooth APP

APP Store/ Google Play: search "Solar app"

* The administrator password of app: 135790123